




6844 Harvester


Walk Around 2026

Overview Walk Around

- 1 Intake Unit
- 2 Chains
- 3 MultiSep
- 4 Hopper
- 5 Boom
- 6 Software
- 7 Machine views

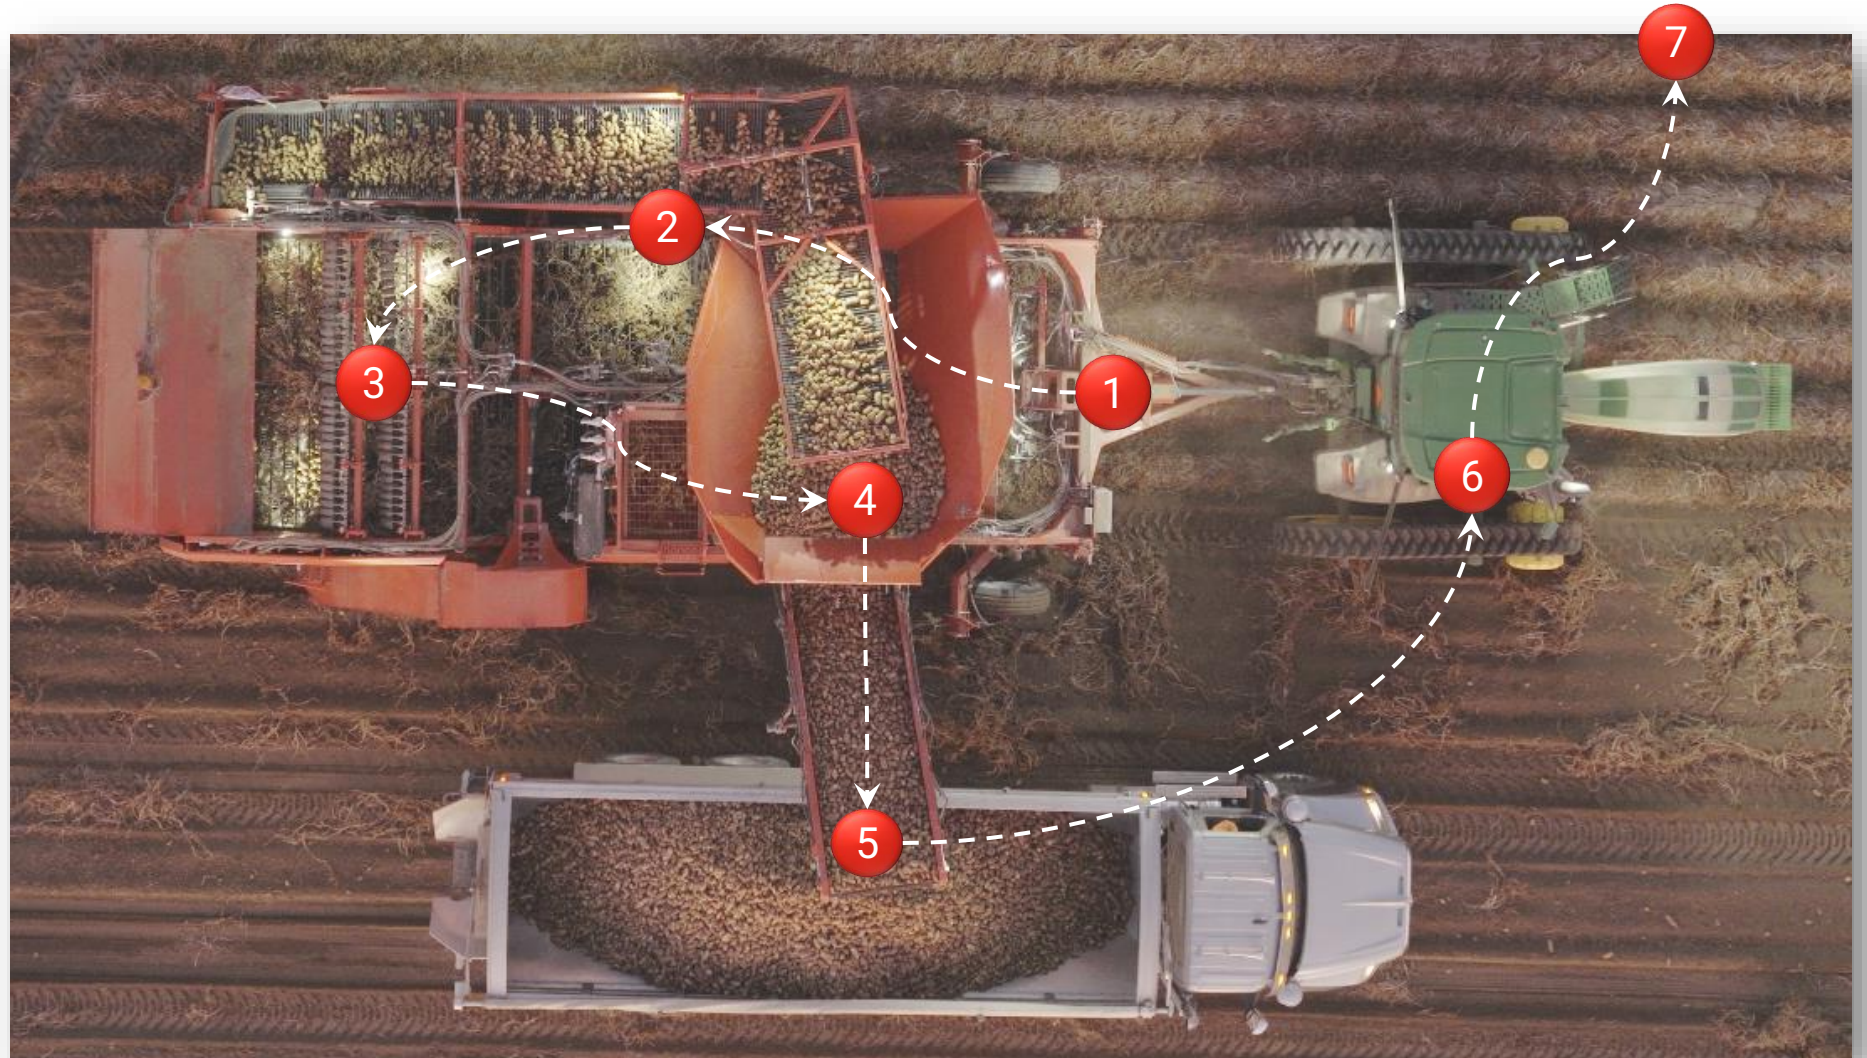

Overview Walk Around

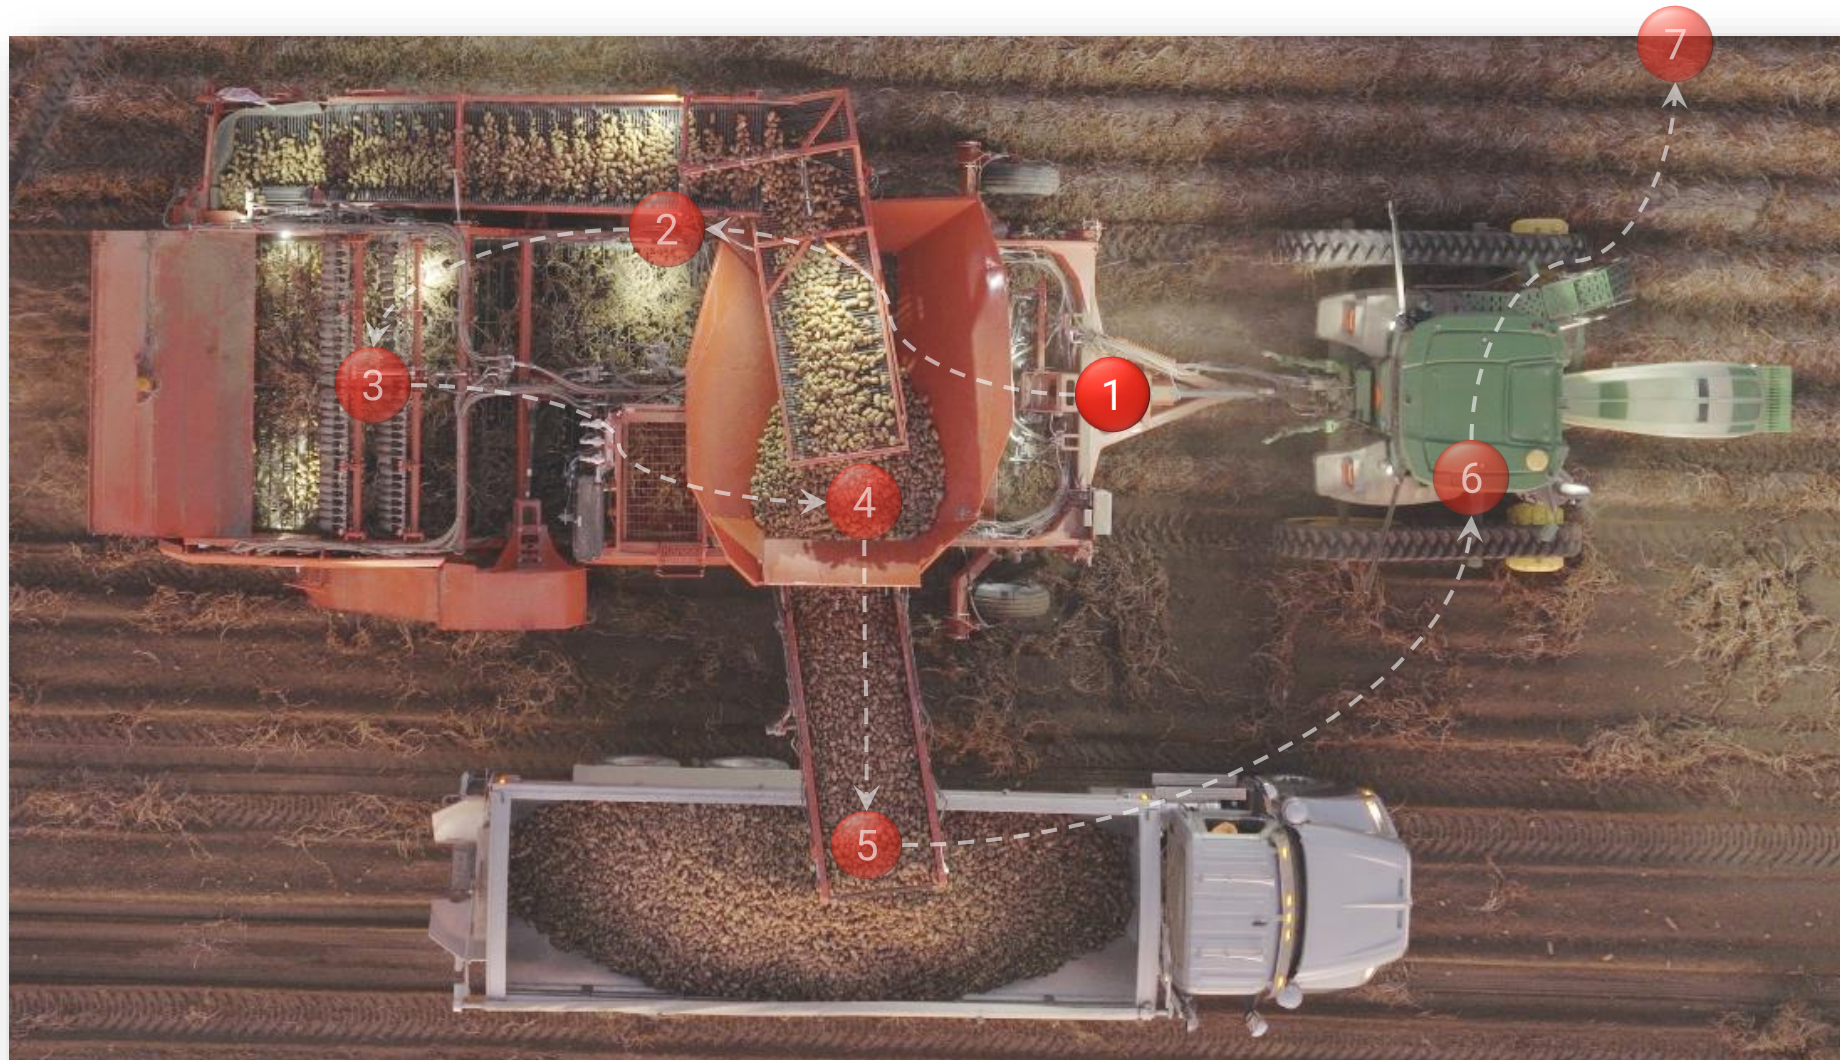

Intake Unit

1

Your Benefits

2 hydraulic adjustable wheels for depth control (option)

Better depth control on hilly fields

Large variety of nose wings and blades that are interchangeable with other 4 row machines

Bigger coulters avoid vine issues

Options: Intake & Primary chain or long Primary


Our Engineering




Intake Unit

1


Intake & Primary:

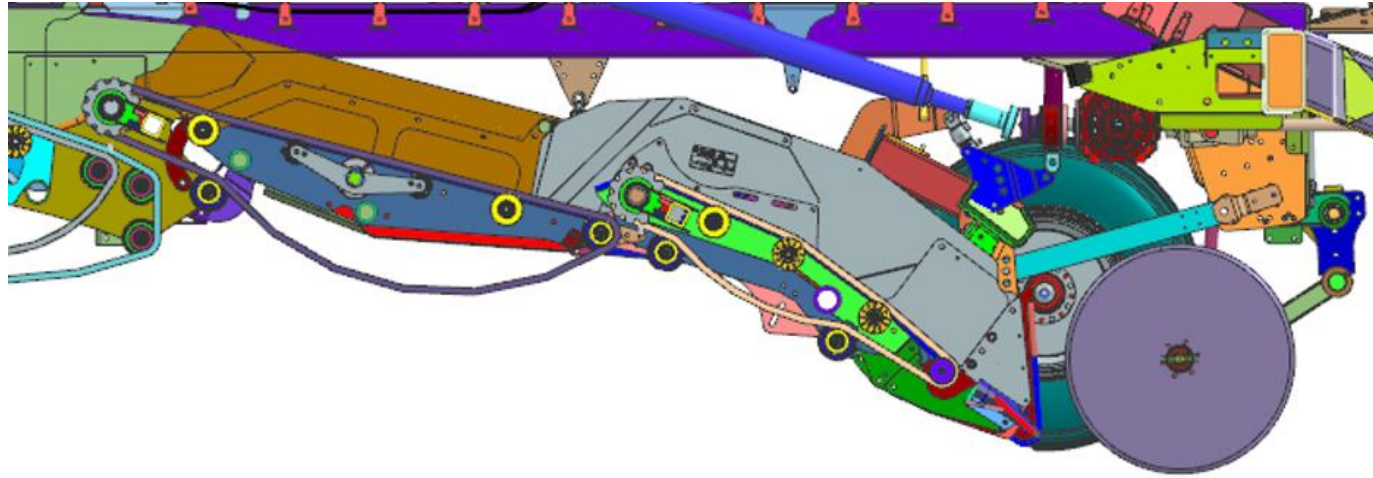

Long Primary (in progress):

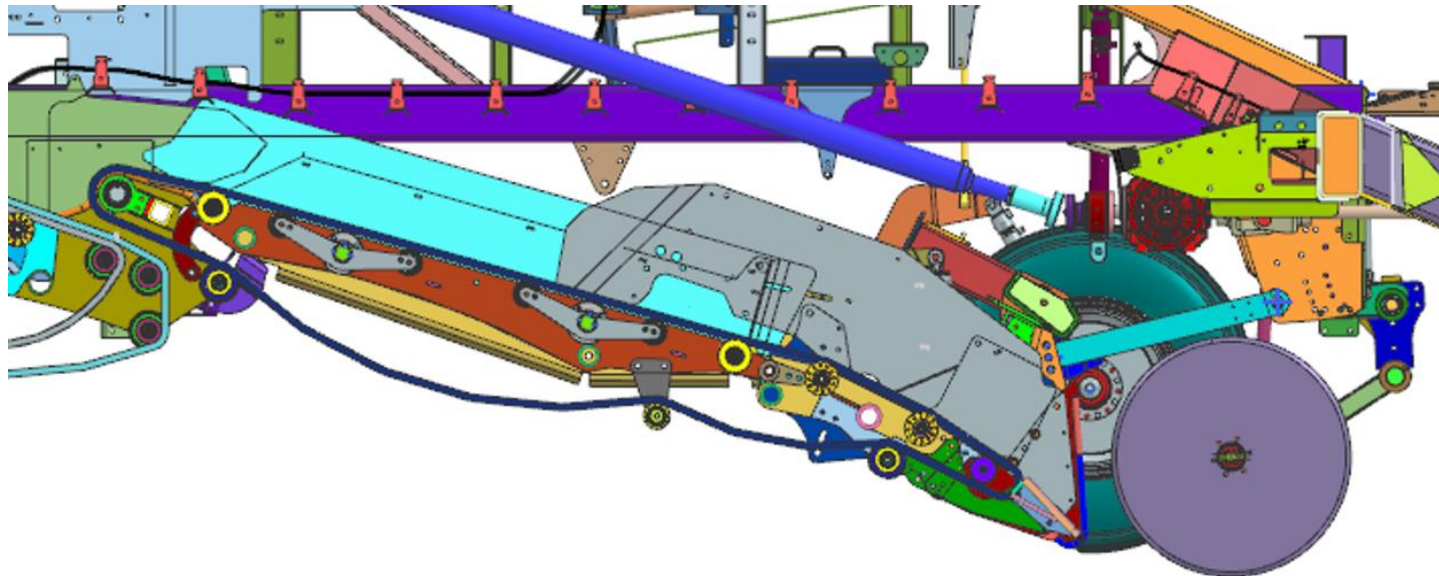

Overview Walk Around

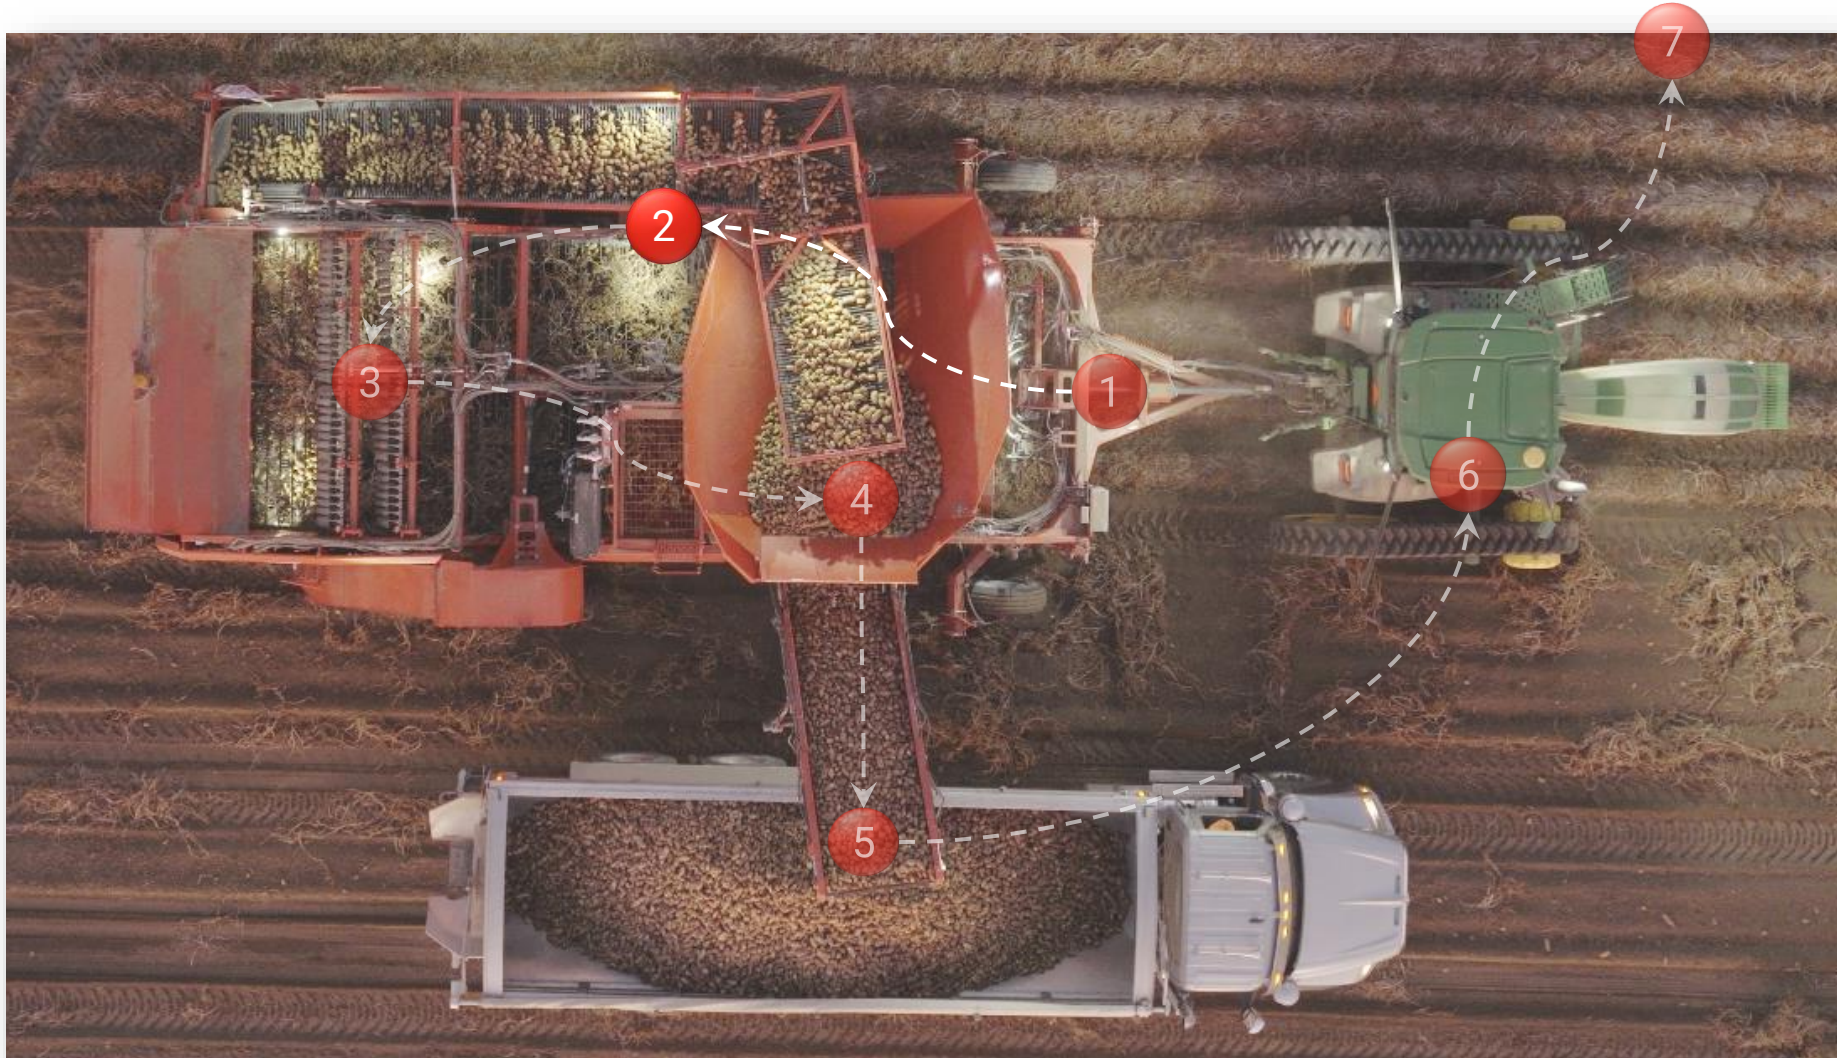

Chains

2

Your Benefits

Options: Primary & Secondary / Intake & Primary & Secondary

Hydraulically driven chains with reverse function


Hump Adjust

Rocker Shakers for the Primary & Secondary

All chains are available from Spudnik

Intake chain: hydraulically driven chain with a mechanical slip clutch

Our Engineering

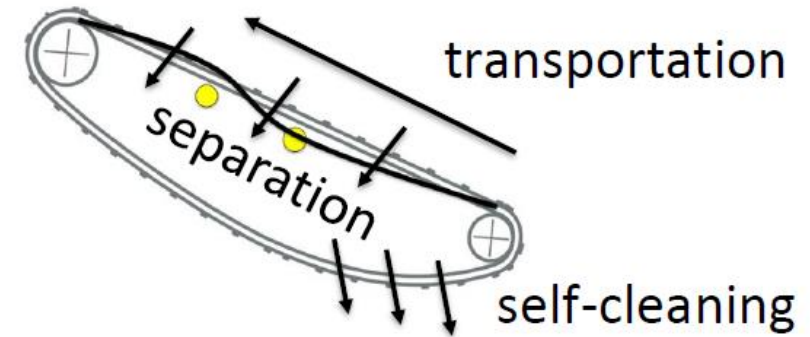

Chains

2



Chain Speed

2

Your Benefits

Fixed Speed: the chain speed is always the same



Ground Speed: the chain speeds are controlled by the harvest speed

The chain speed is independent from the tractor/ PTO rpms and blower speed


Quick changes between “Ground Speed” and “Fixed Speed” are possible while driving

→ **We harvest potatoes bruise free because every chain runs as slowly as possible regardless of the speed**

Our Engineering

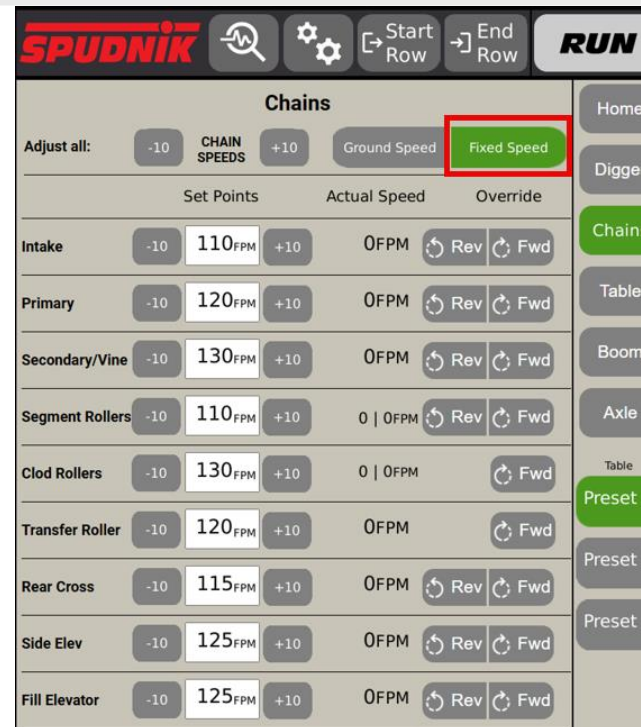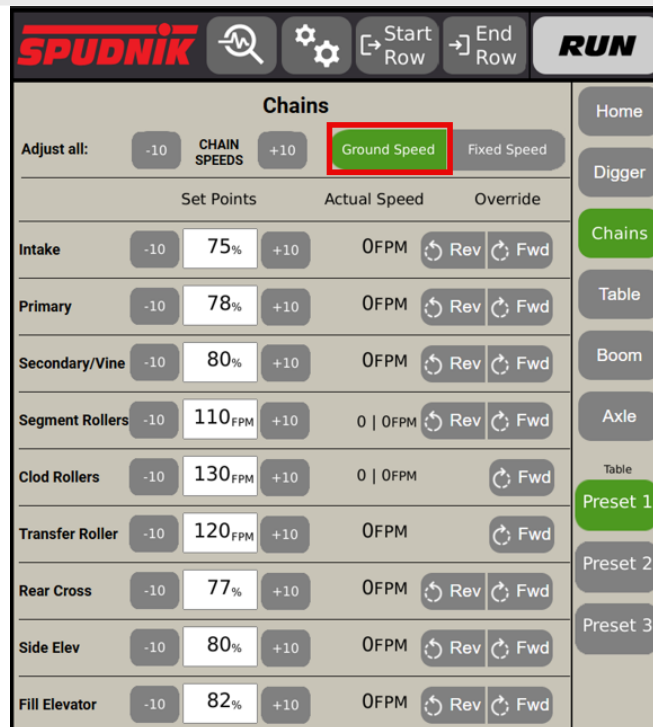

Overview Walk Around






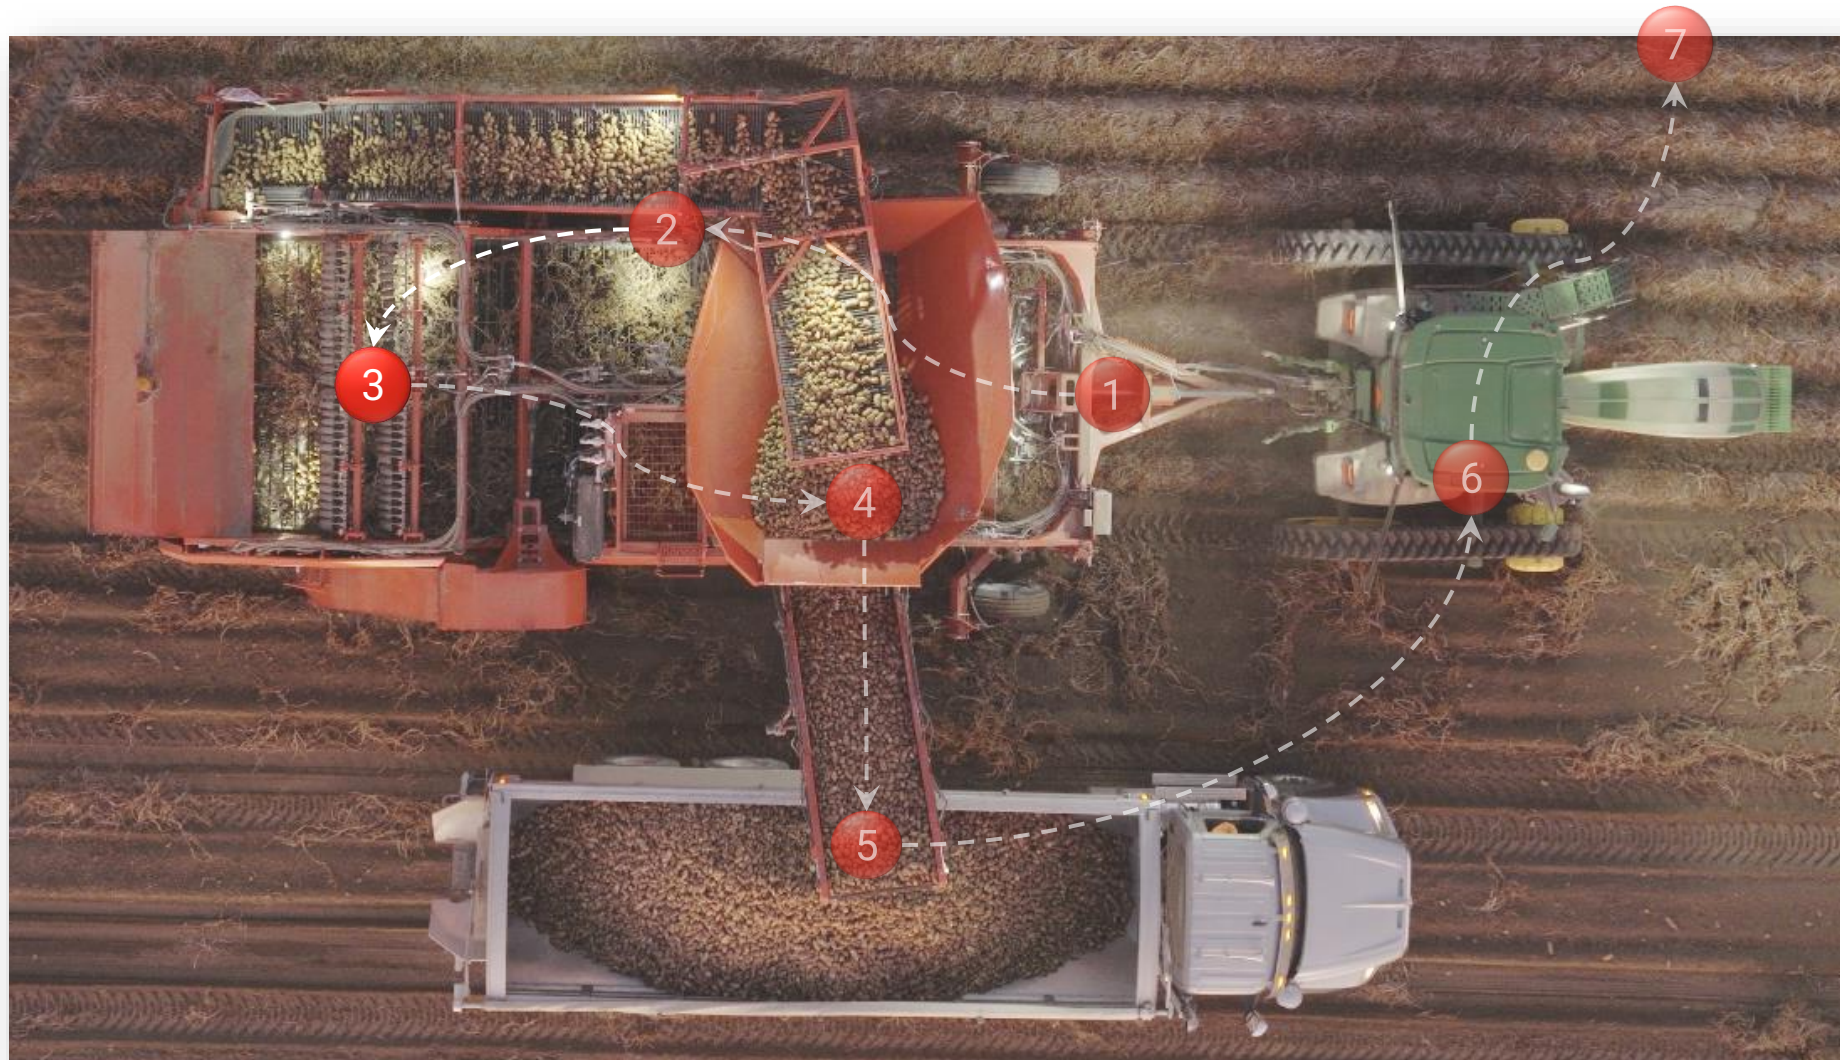


Your Benefits

- Full width MultiSep with steel clod rollers only
- New longer segments with improved connection and end caps
- Improved cleaning due to spread out product
- Increased profitability and productivity
- Flexible adaptation to different potato sizes, types and conditions
- 2x 68" MultiSep table for advanced cleaning
- 3 Presets for quick and easy adjustment for different conditions
- Easy to understand, easy to adjust
- Best user interface in the industry




Our Engineering

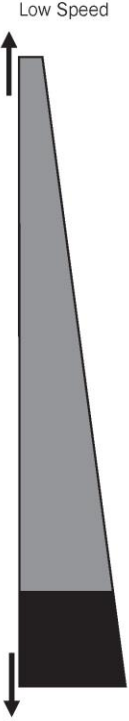
Trash Separation	Distance between flat roller and segment roller	Height of plain roller	Speed
 Aggressive separation Gentle treatment	 Good clod separation, reduced haulm separation	 Can cause clogging if there is a high proportion of haulm	 Low Speed High Speed CAUTION If the potatoes start to bounce do not increase the speed any further
			
	 Good haulm separation, reduced clod separation		



Settings	Effect
Steep Angle	+ Higher product throughout + Reduced risk of loss and damage to crops - Reduced separation
Shallow Angle	+ Higher separation - Increased risk of loss and damage to crops - Reduced product throughout - Higher risk of plugging

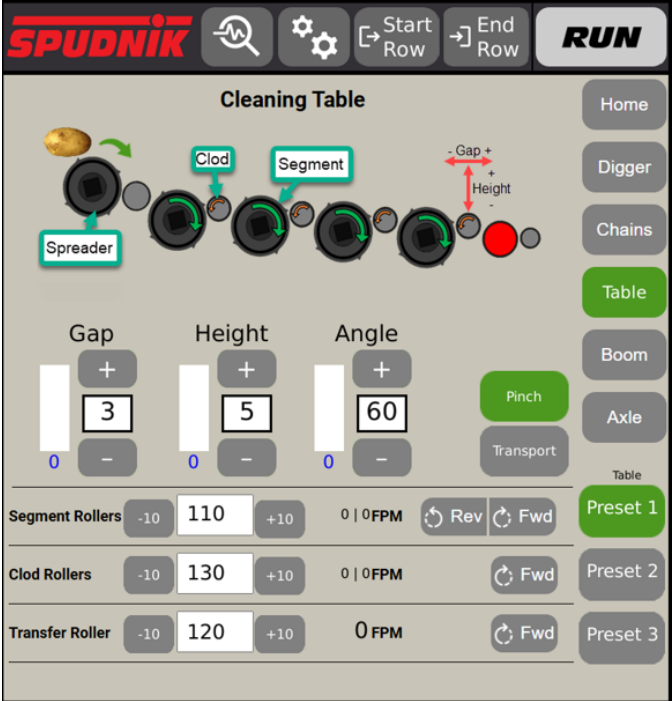

Overview Walk Around

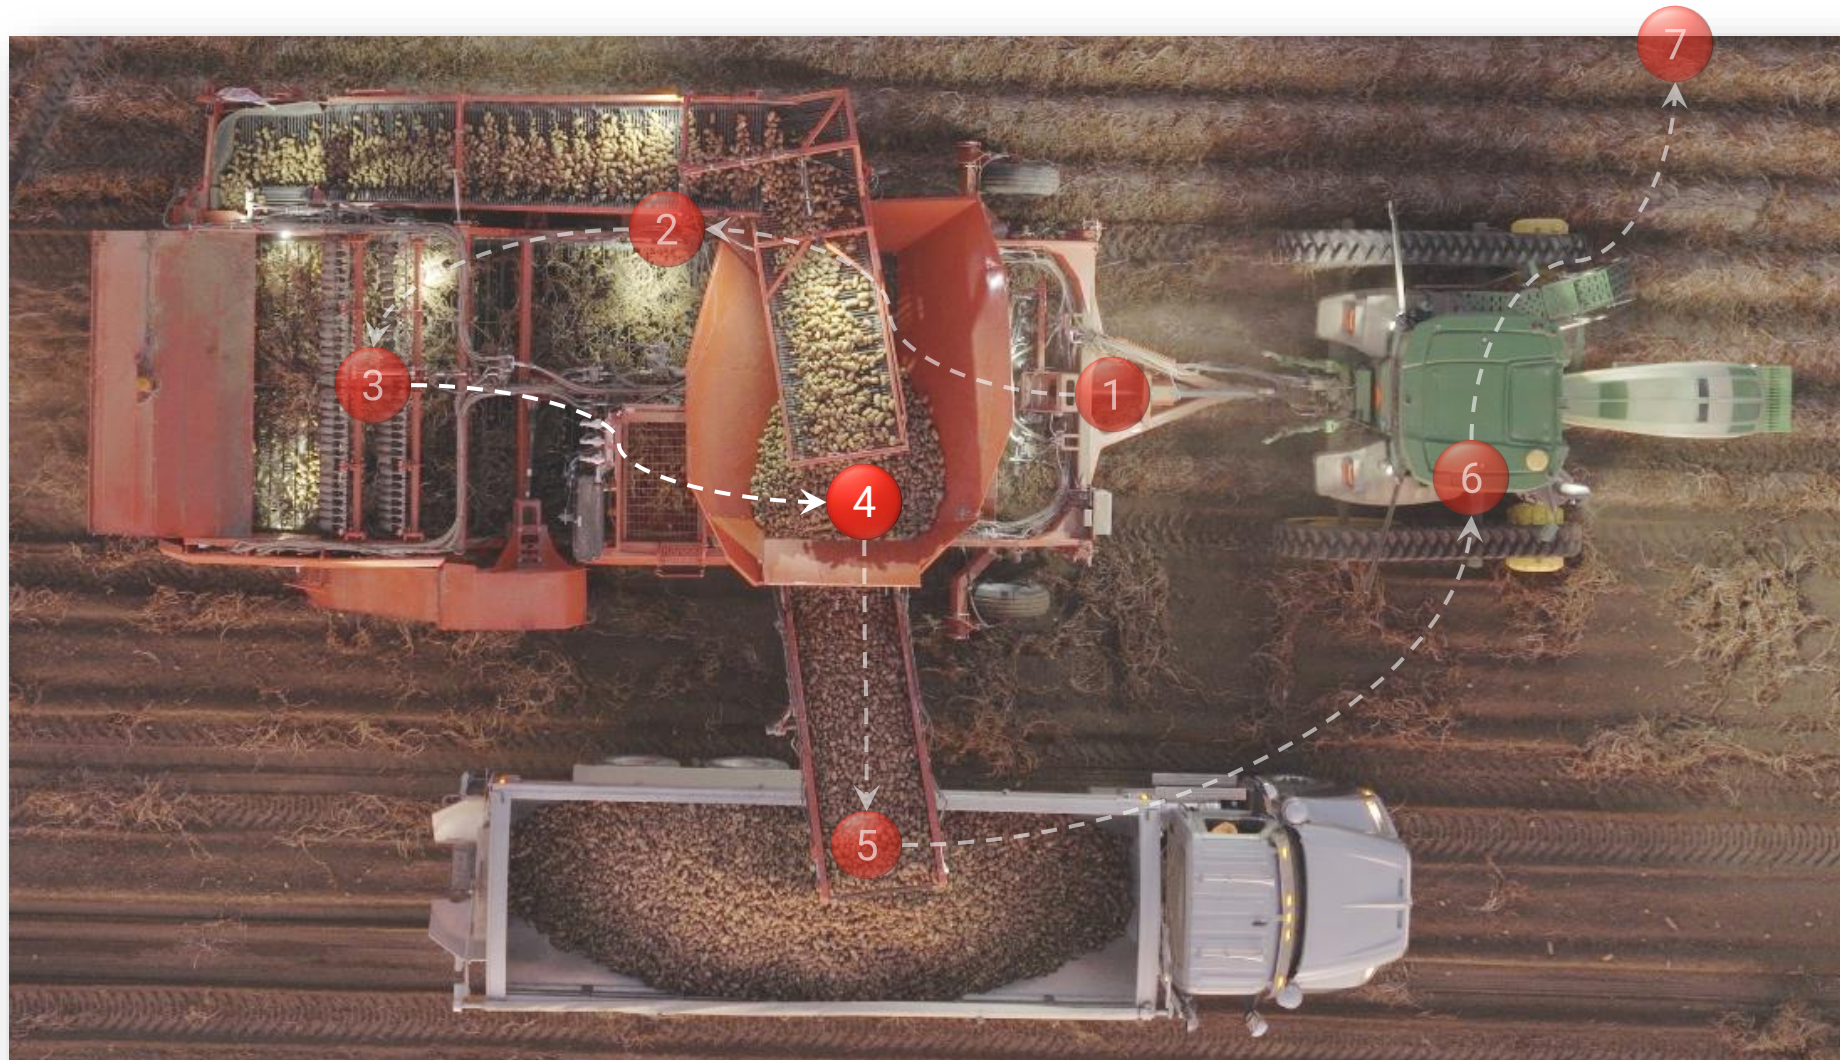

Hopper

4

Your Benefits

165 sacks hopper capacity

Angled fill elevator

60" belt over chain, 56" active width

48" fill elevator and boom

Swinging hopper in 2026 with split bottom belt (like 7040)


2 chains for extra cleaning in the new hopper and controlled boom potato lever to prevent spilling

Our Engineering




Hopper in 2026

4

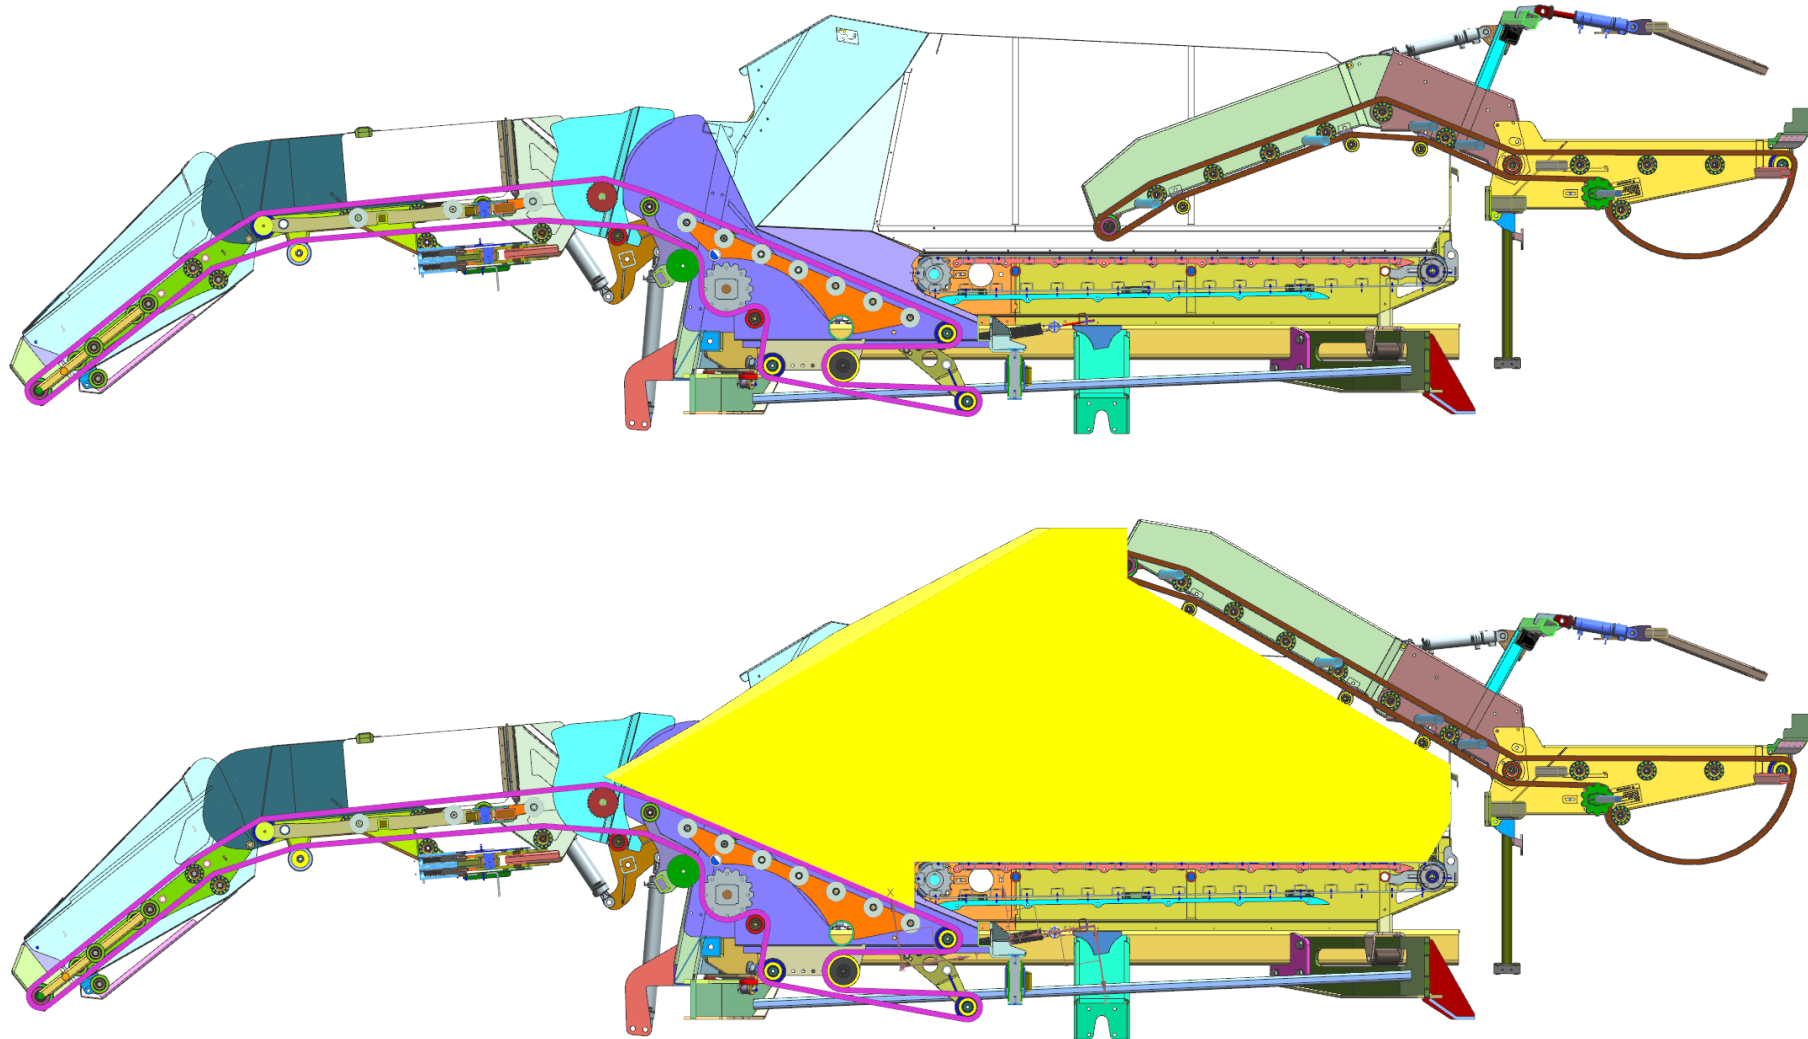

Overview Walk Around

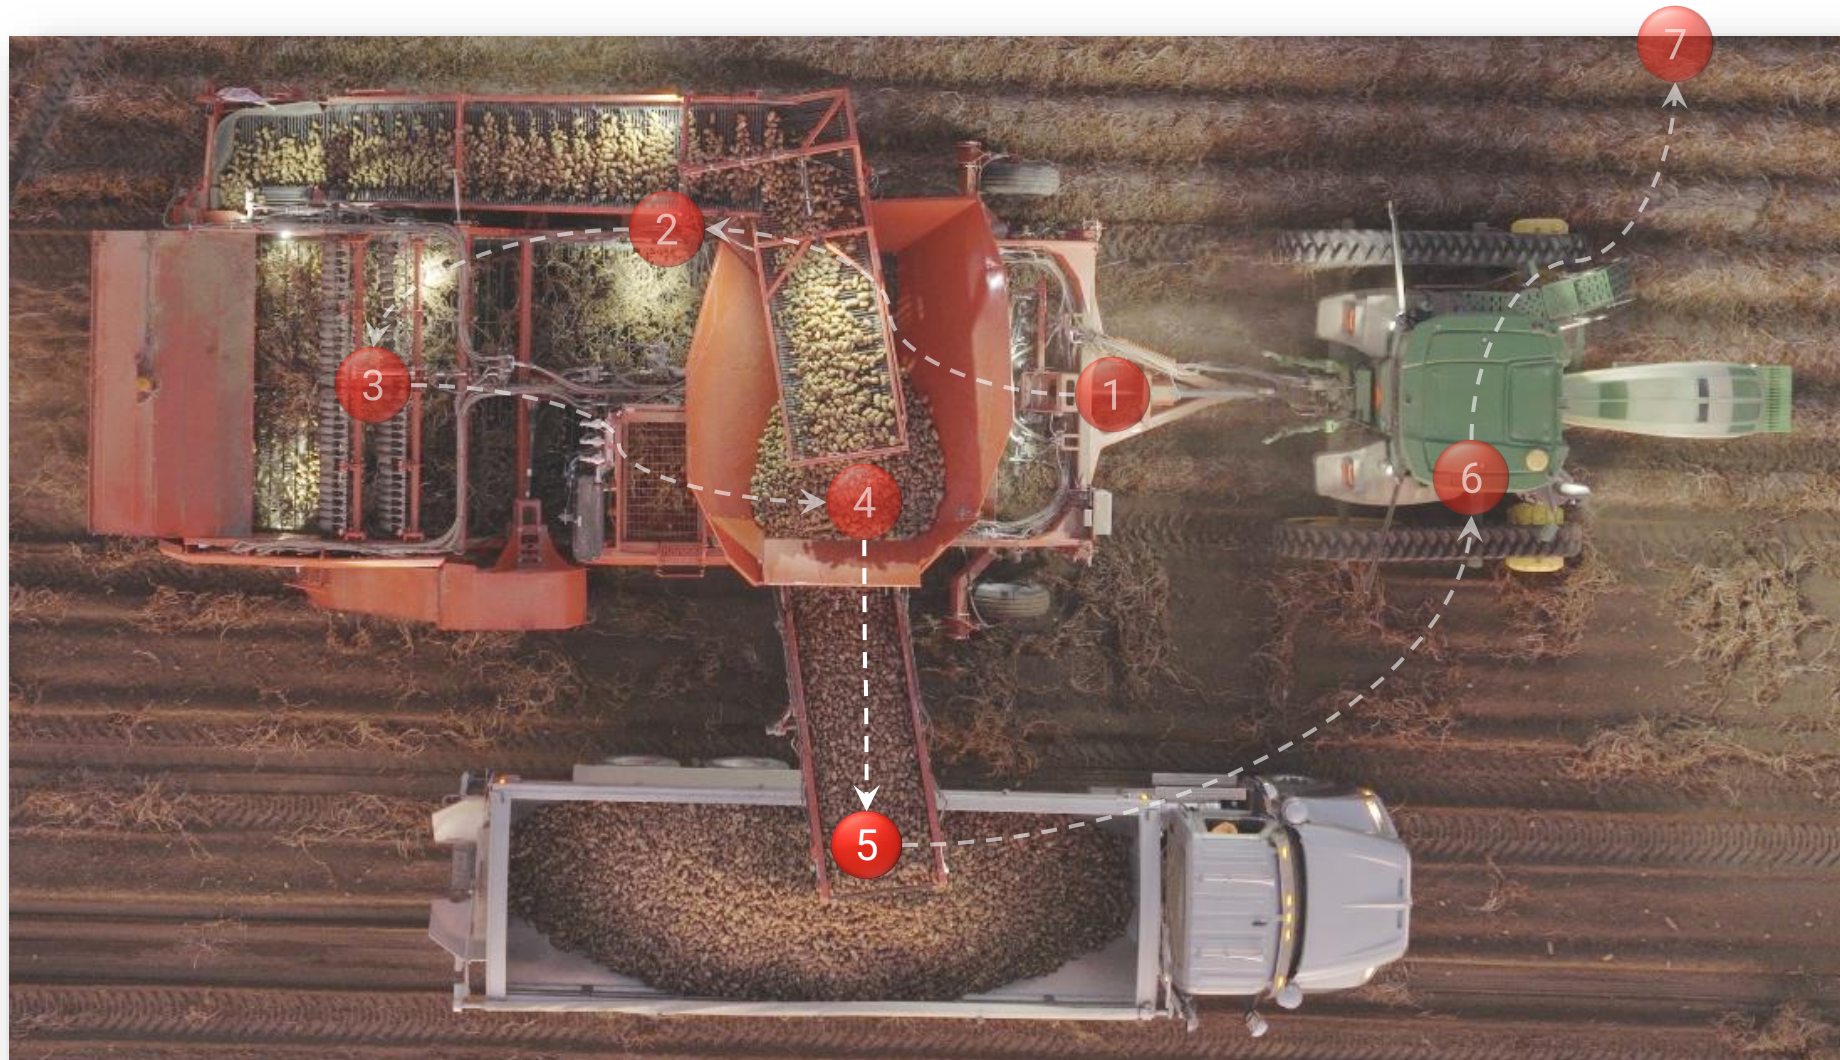

Boom

5

Your Benefits

30" telescoping outer boom

6740 breakaway inner boom

Whole hopper swing 16° forwards and 7° backwards, 130" to 142" total stretch



Adjustable fill elevator, hopper and boom Speed

Our Engineering




Hopper and Boom in 2026

5

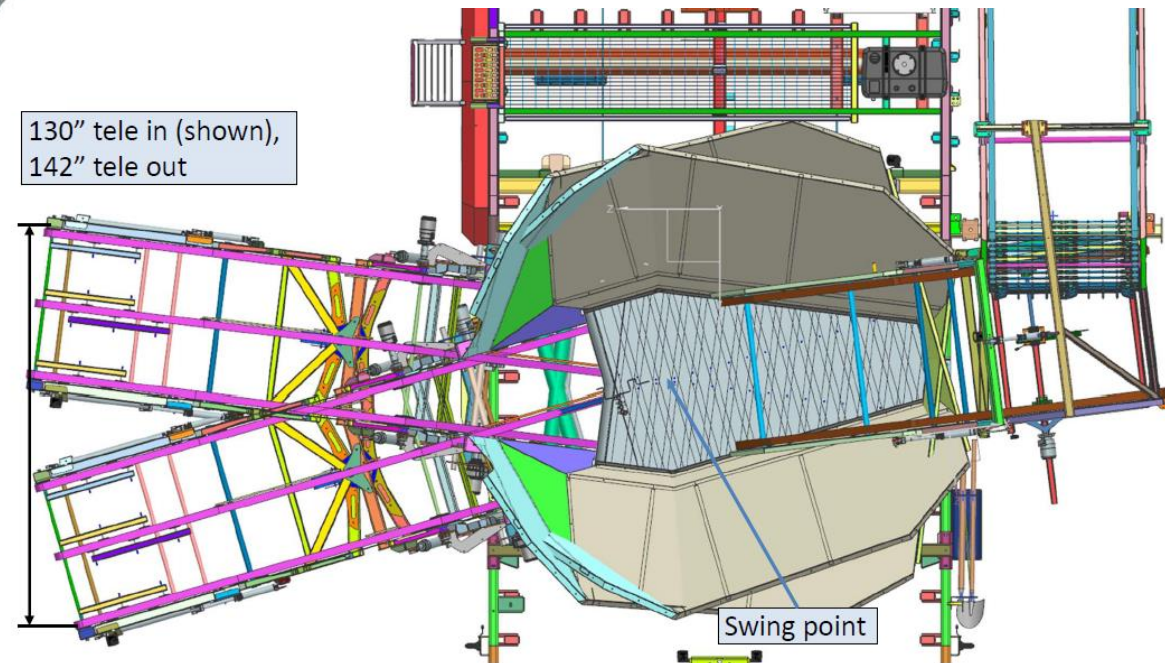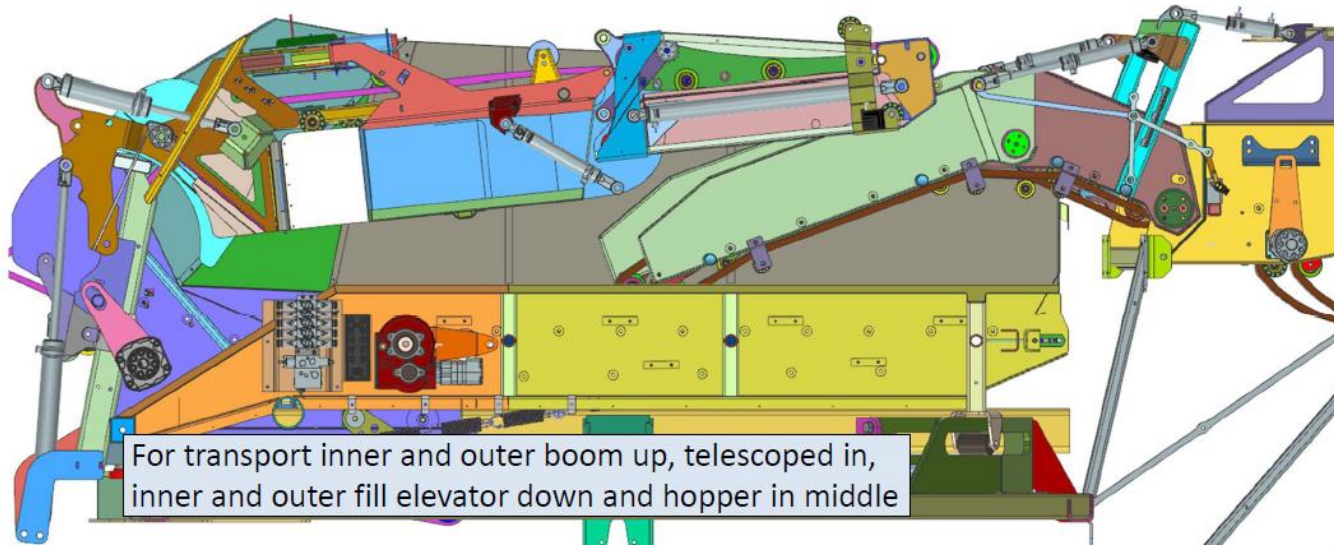

Overview Walk Around

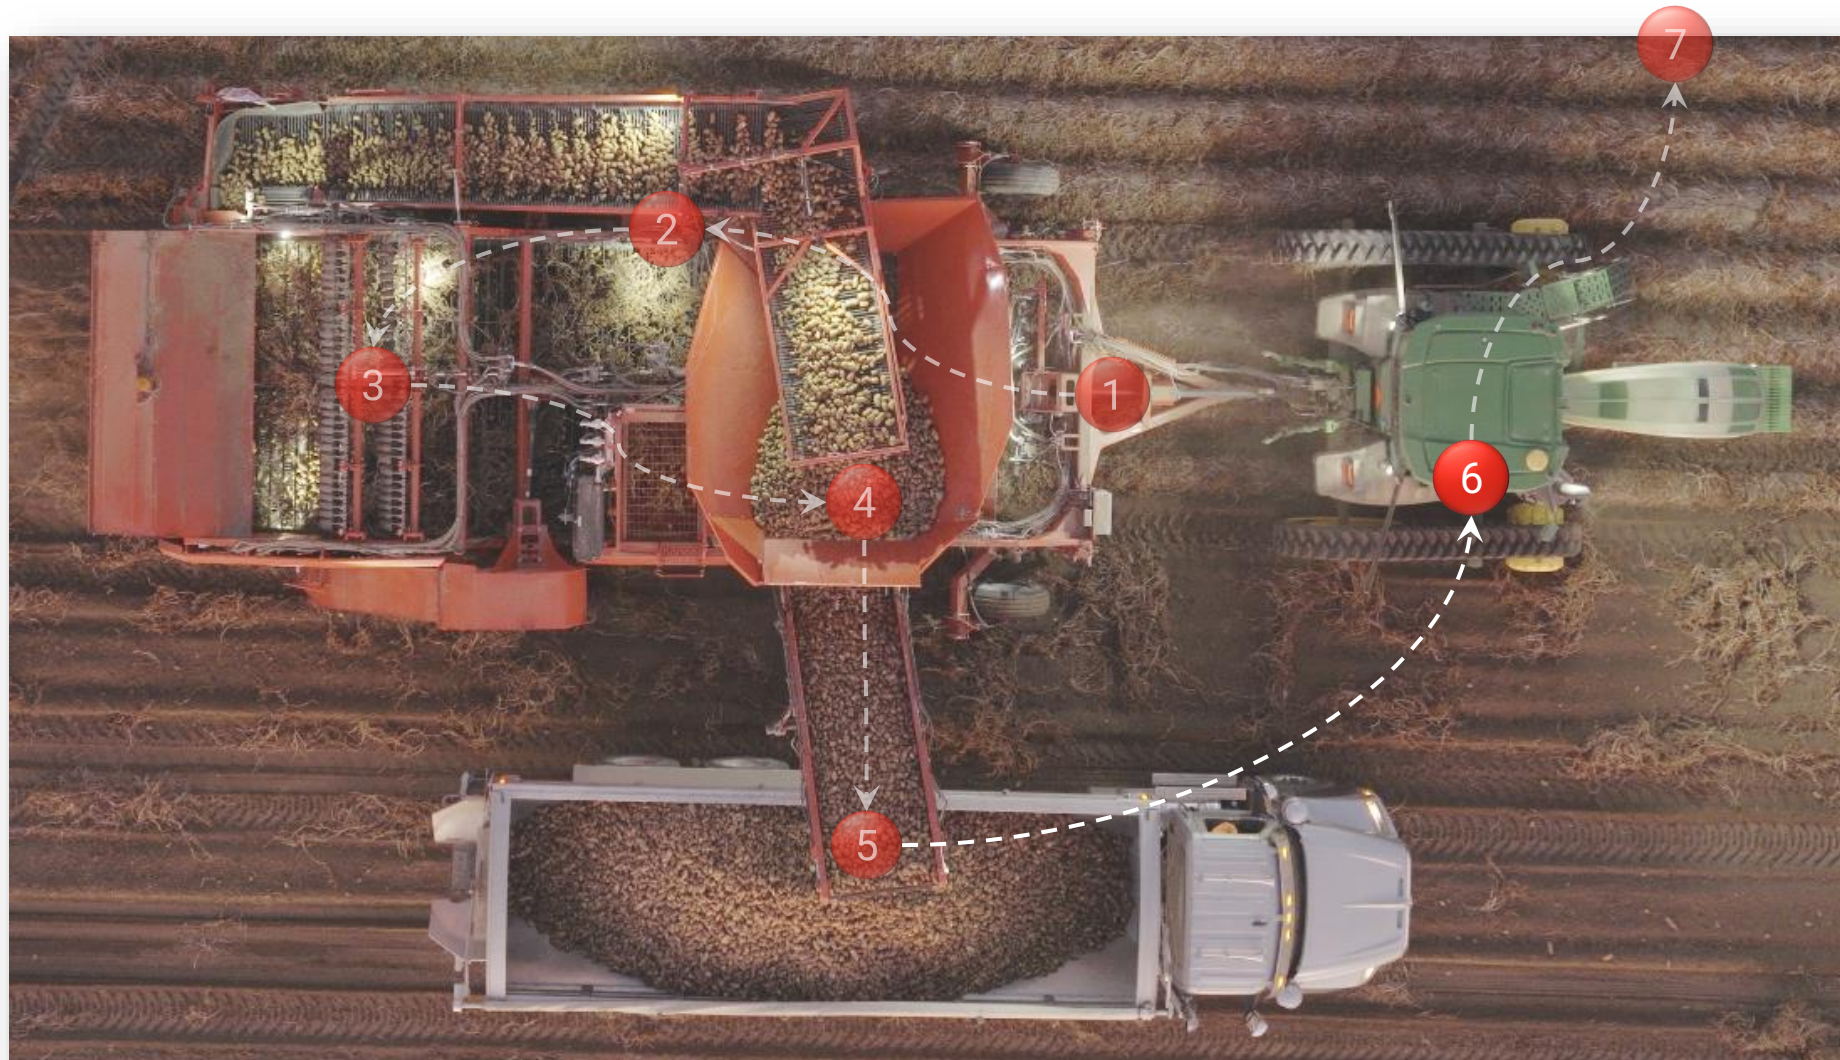

Software

6

Your Benefits


Intuitive user interface

Bigger screen than the CCI 100

Every machine function is adjustable from the cab

Pictures make the software easier to understand


Terminal: Hydac Vision 312+

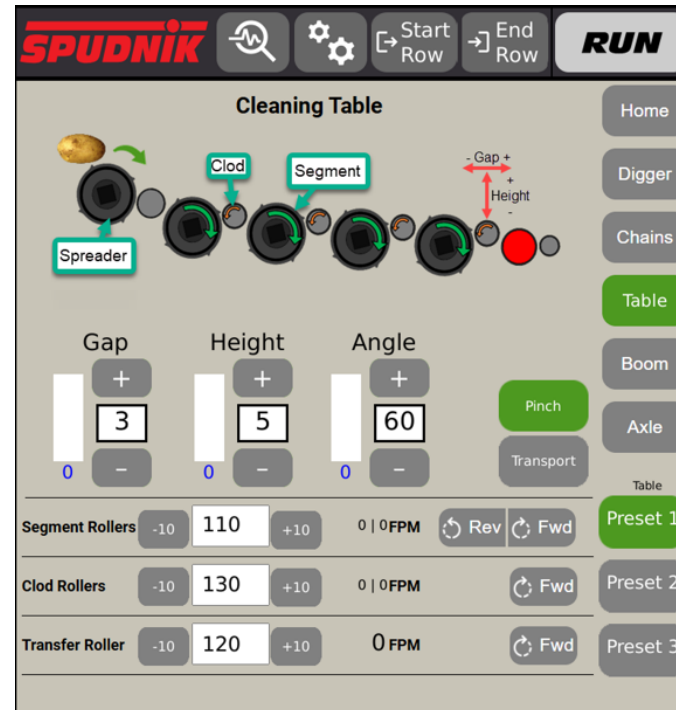


Video System

Your Benefits

- Enhanced Visibility
- Increased Efficiency
- Better Quality Control
- Improved Safety
- Ease of Use & Flexibility and Customization

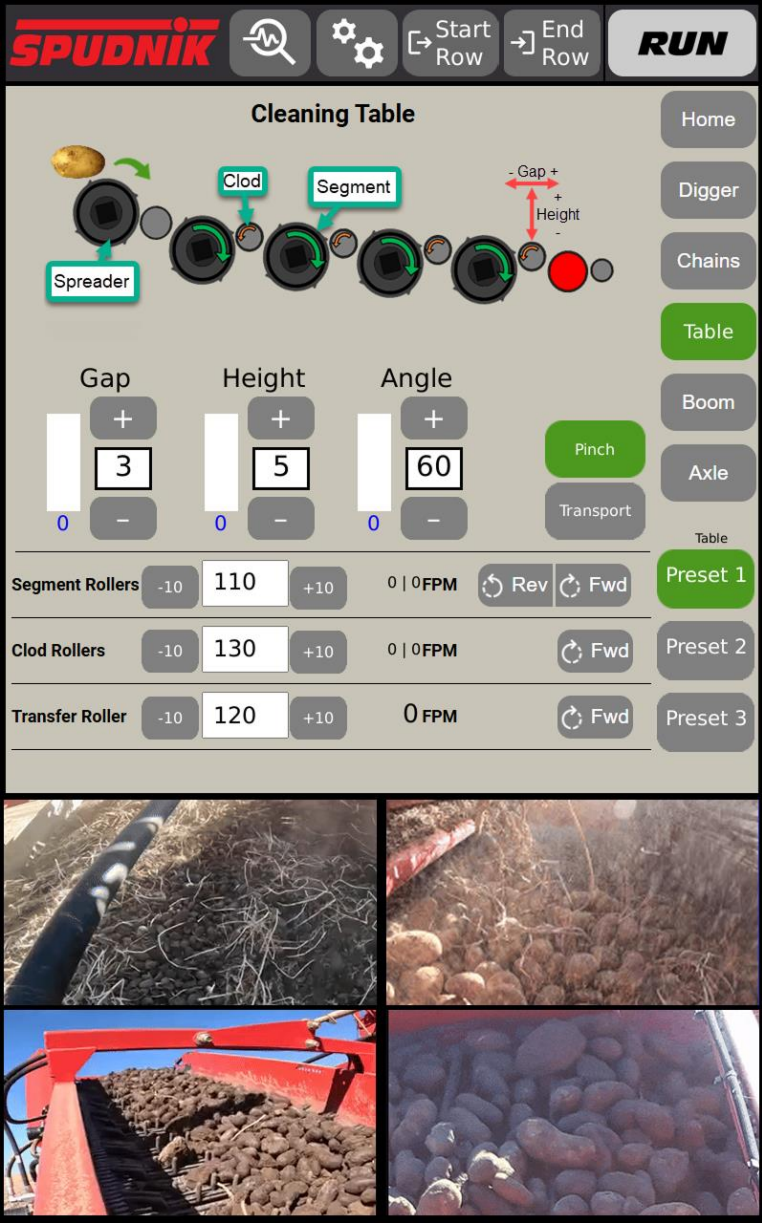

Overview Walk Around

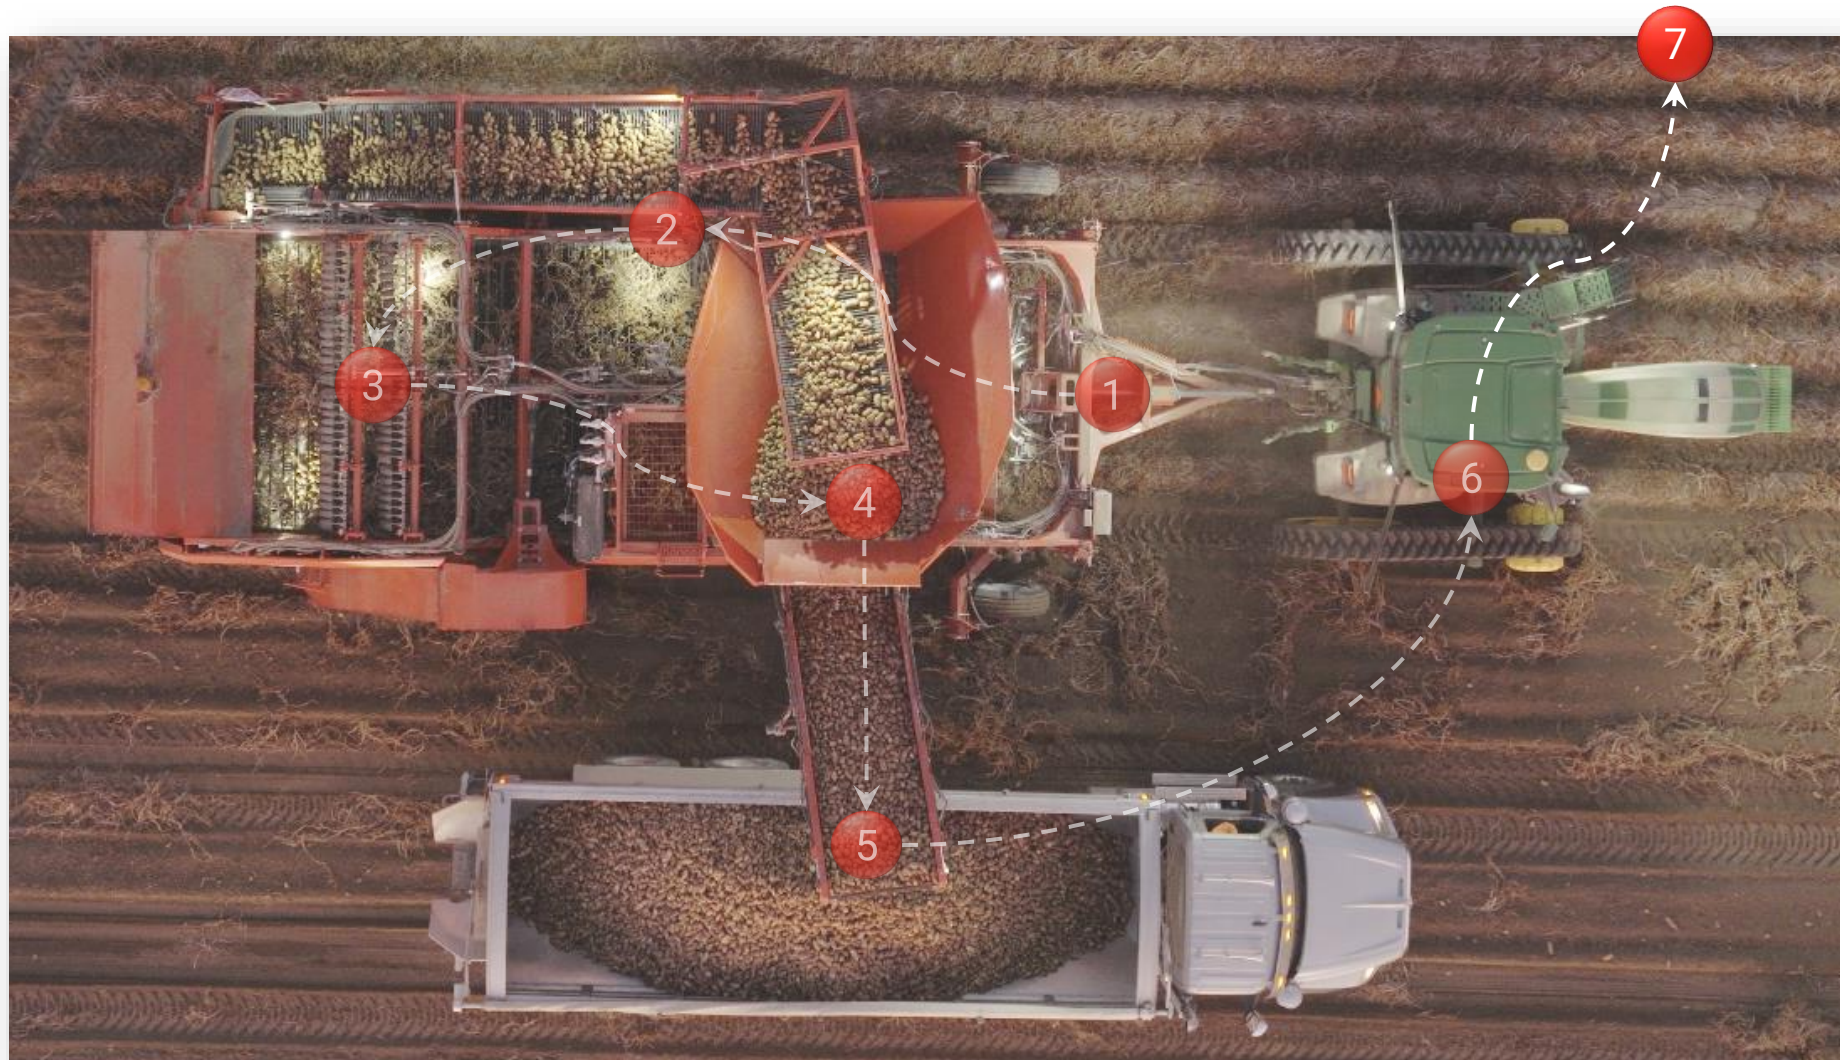

Your Benefits

4 tire axle only with high-capacity VF tires with 46psi only,
size: inner tire: 850/50/R30.5, 33-½" (wide), diameter 64"
size outer tire: VF320/90R42, 12-5/8" (wide), diameter 59-½"

High efficiency blower


Unmatched view into machine

Optimized primary to secondary and vine chain transition

Longer drawbar for wider track width and tires

Stripper kit or snapper roller available

Length: 47.5 ft Height: 13.5 ft Working Width: 21.25 ft Transport Width: 31.25 ft

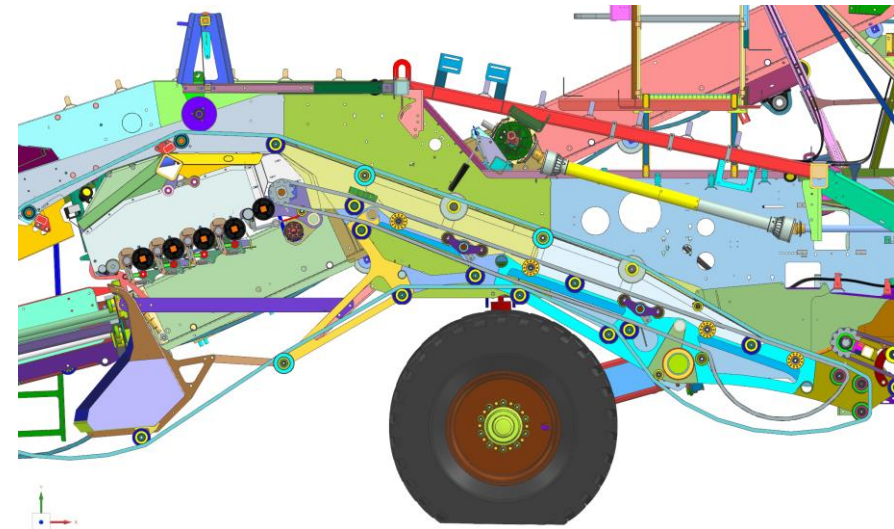

Direct Digging & digging with Windrowers

7



Left and Right



Left and Right

7





A large red Grimme 6844 potato harvester is shown in operation in a vast field. It is being pulled by a green tractor. The harvester is filled with harvested potatoes. The scene is set against a dramatic sunset sky with orange and pink hues. The field is dark brown, and the horizon is visible in the distance.

Thank You!

Hendrik Dettmer
h.dettmer@grimme.de

6844 Harvester

Walk Around 2026

SPUDNIK